

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.


Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problems Mailbox.**

THIS PAGE BLANK (USPTO)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) EP 0 841 041 A2

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
13.05.1998 Bulletin 1998/20

(51) Int Cl.⁶: A61F 2/32, A61F 2/34,
A61L 27/00

(21) Application number: 97309050.9

(22) Date of filing: 11.11.1997

(84) Designated Contracting States:
AT BE CH DE DK ES FI FR GB GR IE IT LI LU MC
NL PT SE
Designated Extension States:
AL LT LV MK RO SI

(72) Inventors:
◦ Farrar, Richard
Lymington, Hampshire SO41 8AN (GB)
◦ Schmidt, Mary Elizabeth
Connecticut 06259 (US)

(30) Priority: 12.11.1996 GB 9623540


(74) Representative: Fisher, Adrian John
CARPMAELS & RANSFORD
43 Bloomsbury Square
London WC1A 2RA (GB)

(71) Applicant: Johnson & Johnson Medical Ltd.
Edinburgh EH2 4NH (GB)

(54) Hip joint prosthesis

(57) A joint prosthesis, such as an artificial hip joint, comprises a first component and a second component, the articulating surfaces of the two components being

formed from a cobalt chromium alloy. The alloy of one of the articulating surfaces has less than 0.1% carbon by weight, while the other comprises at least 0.18% carbon by weight.

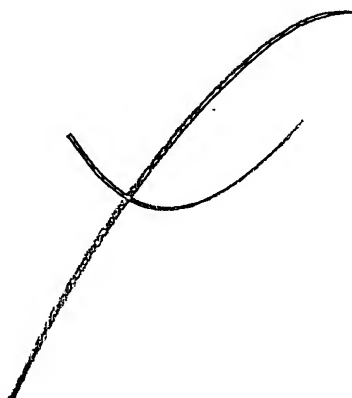

EP 0 841 041 A2

Description

This invention relates to artificial joints, such as hip joint prostheses, comprising two or more components with closely conforming articulating surfaces. More particularly, the invention relates to such artificial joints wherein the articulating surfaces are made of metal.

Artificial joints, such as hip joint, shoulder joints and knee joints, are extremely widely used in orthopaedic surgery. Hip joint prostheses are particularly common. Such prostheses comprise an acetabular component, often referred to as an acetabular cup, and a femoral component. The acetabular component is usually of generally hemispherical shape, and it provides a generally hemispherical inner articulation surface. The femoral component generally comprises a spherical or near-spherical head, attached to an elongate stem. In use, the elongate stem is located in the intramedullary canal of the femur, and the head is located within the acetabular component, to provide articulation between the femur and the acetabulum.

In the first hip joint prostheses, both the inner articulation surface of the acetabular component and the head portion of the femoral component were made of metal, such as cast cobalt chromium alloy. However, such metal-on-metal prostheses were largely superseded by the use of a modified form of acetabular cup, comprising a metal outer shell, and an ultra high molecular weight polyethylene insert. Although prostheses of the latter type have been used in very large numbers, there is some concern that articulation of a metal head in a polyethylene cup causes significant erosion of the cup, with polyethylene debris being released into the surrounding tissue. For this reason, attention is again being focused on metal-on-metal hip joint prostheses.

One currently available metal-on-metal prosthesis is the Metasul™ product distributed by Protek AG. The product literature for this prosthesis specifies that both the cup and the femoral component are made from a forged CoCrMo alloy called Protasul®-21WF. Protasul®-21WF is believed to have a typical carbon content of 0.2% by weight.

Surprisingly, we have found that improved wear is obtained if the two articulating surfaces of a metal-on-metal joint prosthesis are formed from metals which are mis-matched with respect to their carbon content. Accordingly, the present invention provides a joint prosthesis comprising a first component and a second component, the articulation surfaces of the first component and the second component both being formed from a cobalt chromium alloy, characterised in that the articulation surface of the first component or the second component is formed from a cobalt chromium alloy having less than 0.1% carbon by weight, and the other articulation surface is formed from a cobalt chromium alloy comprising at least 0.18% by weight.

Alloys having less than 0.1 wt% carbon are hereafter referred to as low carbon content alloys. Preferably,

low carbon content alloys used in the prostheses of the present invention contain no more than 0.7 wt% carbon, e.g. about 0.6 wt% carbon.

Alloys containing at least 0.18 wt% carbon are hereafter referred to as high carbon content alloys. Preferably, high carbon content alloys used in the prostheses of the present invention contain from 0.2 to 0.35 wt% carbon, e.g. about 0.22 wt% carbon.

The alloys which are used to form the prostheses of the present invention preferably comprise from 58 to 69 wt% cobalt, from 26 to 30 wt% chromium, from 5 to 7 wt% molybdenum and no more than 5 wt% of other elements. More preferably, such alloys comprise no more than 1 wt% nickel, 0.75 wt% iron, 1 wt% silicon, 1 wt% manganese and 0.25 wt% nitrogen. Although wrought alloys are preferred, cast or forged alloys may also be used. Wrought alloys having the composition set out above are described in ASTM F1537, while forged alloys of the same composition are described in ASTM F799. Cast alloys preferably have a chromium content of 27 to 30% by weight. A suitable cast alloy is ASTM F75.

Preferably, the joint prosthesis is a hip joint prosthesis wherein the first component is an acetabular cup and the second component is a femoral component.

The articulating surfaces of prostheses according to the invention will usually be substantially congruent. In the case of hip joint prostheses, such surfaces will be generally spherical, preferably with a departure from roundness no greater than 10 µm when measured in accordance with the minimum zone centre method given in ISO 4291. More preferably, the articulating surfaces will have a roundness error no greater than 8 µm, and most preferably no greater than 5 µm.

~~In order to minimise wear, the articulating surfaces~~ of the prostheses of the invention will usually also be highly polished. Preferably, the articulating surfaces will have an R_a value (as measured in accordance with ISO 468) no greater than 0.1 µm, and more preferably no greater than 0.05 µm. Particularly preferred prostheses according to the invention will have articulating surfaces with an R_a value no greater than 0.02 µm.

Hip joint prostheses according to the present invention may take any of various forms. For example, the femoral component may be of the cemented or cementless type, and it may be provided with a collar for transmission of load to the calcar of the femur. Similarly, the acetabular component may be of the cemented or cementless type.

When cementless femoral or acetabular components are used in accordance with the present invention, they may be provided with porous outer surfaces to encourage attachment of bone, as is well known in the art. Suitable porous surfaces may be provided by a variety of procedures such as simple rough blasting, chemical etching or application of plasma sprayed layers. Sintered porous coating comprising beads, mesh or fibre pads may also be used.

Cemented prostheses in accordance with the present invention will generally have relatively smooth surface finishes to prevent abrasion of the cement.

It will be understood that the prostheses of the present invention need not be made entirely from cobalt chrome alloy. For example, an acetabular cup may comprise a cobalt chrome alloy insert which provides the articulating surface, and an outer shell formed from titanium, titanium alloy, cobalt chrome alloy or even ceramic. Stainless steel could also be used for the outer shell if the insert and the shell are electrically insulated to prevent galvanic corrosion.

Similarly, a femoral prosthesis may comprise a cobalt chrome alloy head, and a stem formed from titanium, titanium alloy or cobalt chrome alloy.

An embodiment of a joint prosthesis in accordance with the present invention in the form of a hip joint prosthesis is now described with reference to the accompanying drawings, in which:

Figure 1 is a cross-sectional view of an acetabular component and a femoral head of the hip joint prosthesis;

Figure 2 is a perspective view of the outer shell of the acetabular component of Figure 1; and

Figure 3 is a perspective view of an insert of the acetabular component of Figure 1.

Figure 1 shows a hip prosthesis 1 comprising an acetabular component 12 and a femoral component 14. The acetabular component 12 is formed of an insert 18 with an inner articulating surface 20, the insert 18 being disposed within a shell 17. The insert 18 is of a wrought cobalt chrome alloy conforming to ASTM F1537 and having a carbon content of approximately 0.22% by weight, while the shell 17 is of a titanium alloy (Ti6Al4V).

The inner articulating surface 20 of the insert 18 is substantially congruent with the surface of a femoral head 16 of a femoral component 14. The femoral component 14 also comprises a femoral stem to which the femoral head 16 is attachable. Both the head 16 and the stem are of a cobalt chrome alloy conforming to ASTM F1537. However, in contrast to the insert 18, the alloy from which the head 16 is formed has a carbon content of approximately 0.06% by weight.

The insert 18 is generally hemispherical and has a portion of its outer surface 30 in the form of a band adjacent the rim 38 of the insert 18 which is angled to form a taper fit with an angled inner surface 32 of the shell 17. There is an area of clearance between the remainder of the outer surface of the insert 18 and the inner surface of the shell 17. The shell 18 has a groove 36 at its rim 38 in which an extraction instrument can be located.

The shell 17 of the acetabular component 12 has a

ridged outer surface 22 which can be coated as discussed above to enhance the attachment of bone. The shell 17 of the described embodiment has three apertures 24 through which screws are placed for securement of the shell 17 to the patient's hip bone. The screws are attached prior to the insertion of the insert 18 into the shell 17. The apertures 24 are unthreaded and are dual tapered 34 outwardly towards the inner and outer surfaces of the shell 17. The smallest diameter 26 of each aperture 24 prevents the screw from passing through the aperture 24. The shell 17 also has an apical threaded aperture 28 for instrumentation attachment and for viewing.

Experimental

The wear of hip joint prosthesis components was assessed by subjecting an acetabular component and a femoral component to repeated articulation representative of a normal walking cycle. Testing was conducted using a model EW-12 hip simulator, manufactured by Materials Technology Inc., La Canada, California.

The femoral heads used in this evaluation had a diameter of 28 mm. The nominal clearance (cup diameter minus head diameter) between the femoral heads and the acetabular cups during testing was 0.050 mm. Actual clearances ranged from 0.045 mm to 0.054 mm. The components were subjected to a loading curve during testing that is equivalent to that developed during a walking cycle. Peak load was approximately 2000 N.

During testing the hip prostheses were completely immersed in bovine serum. Tests were conducted for up to two million cycles. Wear was assessed by measuring the total weight loss of the two components during testing.

In all cases, the prostheses had articulation surfaces formed from cobalt chromium alloy conforming to ASTM F1537. However, the samples differed in the carbon content of the alloy used. Low-carbon (approximately 0.06 wt% carbon) femoral components were matched with either low-carbon or high-carbon (approximately 0.22 wt%) acetabular cups, and high-carbon femoral components were similarly matched with either low-carbon or high-carbon cups. Surprisingly, the highest average wear (weight loss) was observed for prostheses in which the femoral head and the acetabular cup were both formed from low carbon content alloy, or both from high carbon content alloy. The lowest average wear (weight loss) was observed for prostheses in which a low carbon content alloy was used for the femoral head and a high carbon content alloy was used for the acetabular cup (or *vice versa*).

Claims

1. A joint prosthesis comprising a first component and a second component, the articulation surfaces of

- the first component and the second component both being formed from a cobalt chromium alloy, characterised in that the articulation surface of the first component or the second component is formed from a cobalt chromium alloy having less than 0.1% carbon by weight, and the other articulation surface is formed from a cobalt chromium alloy comprising at least 0.18% carbon by weight. 5
2. A prosthesis according to claim 1 wherein the articulation surface of the first component or the second component is formed from a cobalt chromium alloy comprising from 0 to 0.07% carbon by weight, and the other articulation surface is formed from a cobalt chromium alloy comprising 0.2 to 0.35% carbon by weight. 10 15
3. A prosthesis according to claim 1 or claim 2 wherein the first component and the second component are formed from an alloy comprising from 58 to 69% cobalt, from 26 to 30% chromium, from 5 to 7% molybdenum and no more than 5% (in total) of other elements, all percentages being by weight. 20
4. A prosthesis according to claim 3 wherein said alloy comprises no more than 1% nickel, 0.75% iron, 1% silicon, 1% manganese and 0.25% nitrogen. 25
5. A prosthesis according to claim 4 wherein said alloy is a wrought alloy. 30
6. A prosthesis according to claim 5 wherein said wrought alloy conforms to ASTM F1537.
7. A hip joint prosthesis according to any preceding claim. 35
8. A prosthesis according to claim 7 wherein the first component is a hip head prosthesis and the second component is an acetabular cup prosthesis. 40
9. A hip joint prosthesis, comprising
 an acetabular cup having an articulation surface; and 45
 a femoral head having an articulation surface,
 wherein the articulation surface of one of the acetabular cup and the femoral head is made of a metal alloy having a low carbon content and the articulation surface of the other of the acetabular cup and the femoral head is made of a metal alloy having a high carbon content. 50
10. A hip joint prosthesis according to claim 9 wherein the carbon content of the low carbon content metal alloy is in the range of 0.03 to 0.10 wt% carbon. 55
11. A hip joint prosthesis according to claim 9 wherein the carbon content of the high carbon content metal alloy is in the range of about 0.18 to 0.35 wt% carbon.

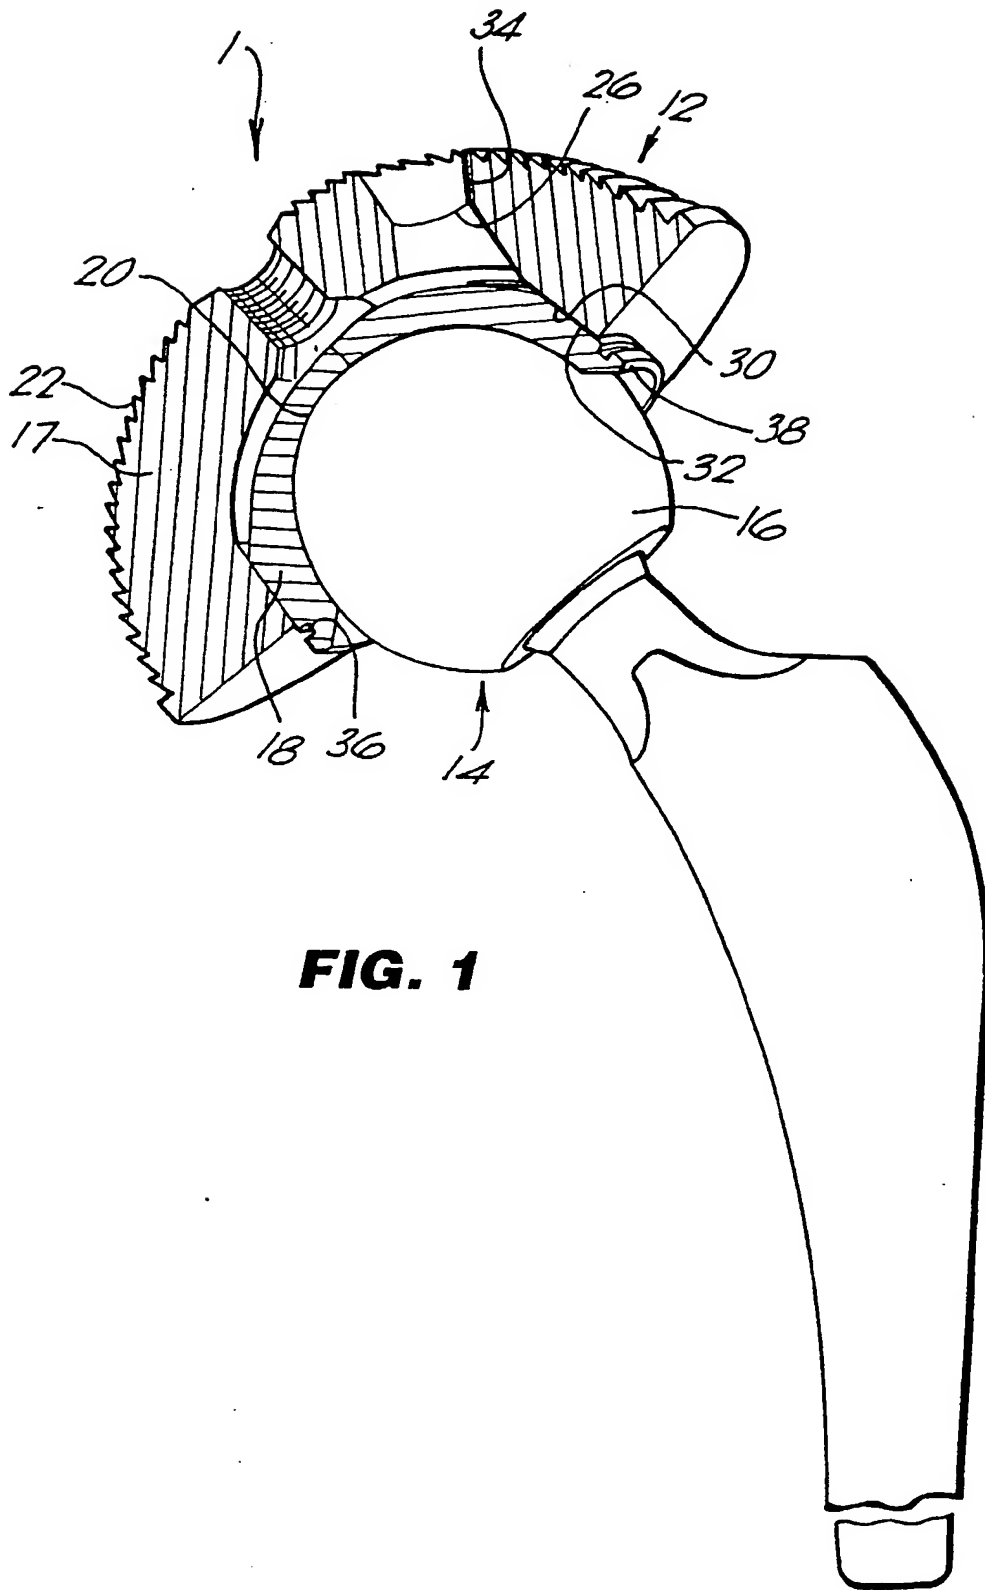


FIG. 1

FIG. 2



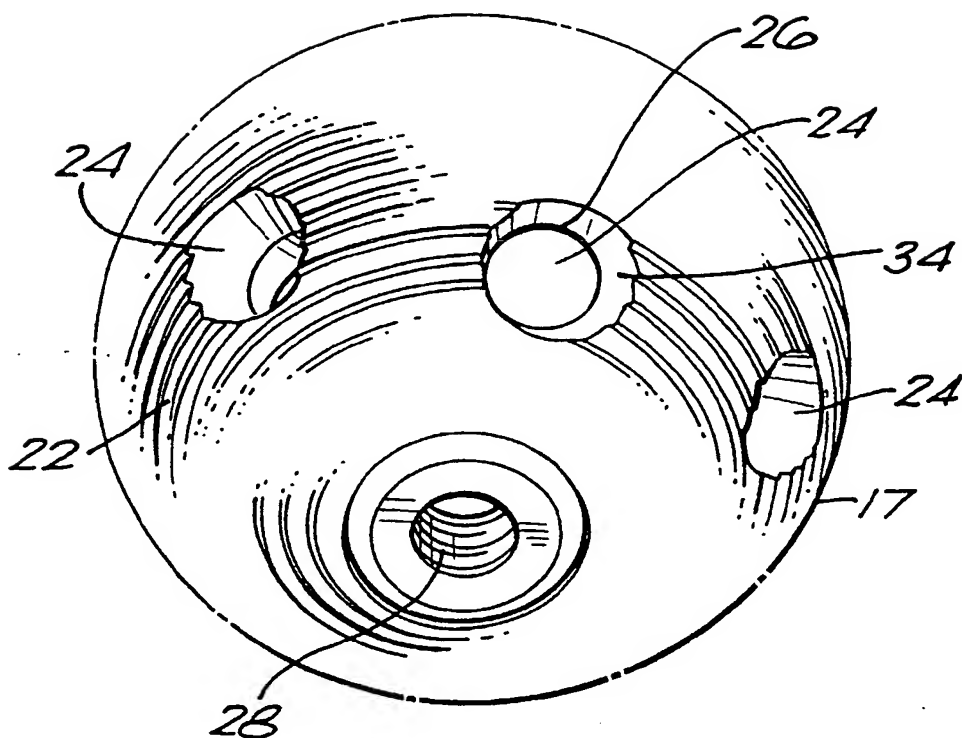


FIG. 3



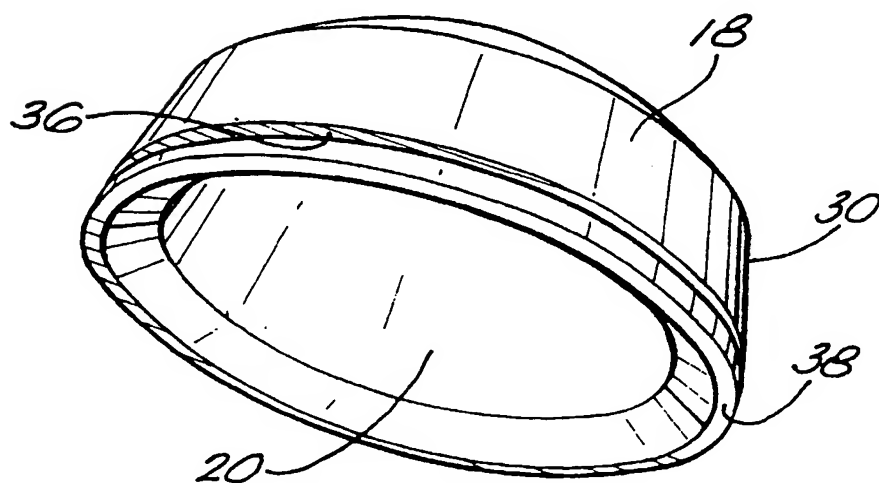

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 0 841 041 A3

(12)

EUROPEAN PATENT APPLICATION

(88) Date of publication A3:
17.03.1999 Bulletin 1999/11

(51) Int Cl.⁶: **A61L 27/00**, **A61F 2/32**,
A61F 2/34

(43) Date of publication A2:
13.05.1998 Bulletin 1998/20

(21) Application number: **97309050.9**

(22) Date of filing: **11.11.1997**

(84) Designated Contracting States:
**AT BE CH DE DK ES FI FR GB GR IE IT LI LU MC
NL PT SE**
Designated Extension States:
AL LT LV MK RO SI

(72) Inventors:
• **Farrar, Richard**
Lymington, Hampshire SO41 8AN (GB)
• **Schmidt, Mary Elizabeth**
Connecticut 06259 (US)

(30) Priority: **12.11.1996 GB 9623540**

(71) Applicant: **Johnson & Johnson Medical Ltd.**
Edinburgh EH2 4NH (GB)

(74) Representative: **Fisher, Adrian John**
CARPMAELS & RANSFORD
43 Bloomsbury Square
London WC1A 2RA (GB)

(54) Hip joint prosthesis

(57) A joint prosthesis, such as an artificial hip joint (1), comprises a first component (12) and a second component (14), the articulating surfaces (20,16) of the two components (12,14) being formed from a cobalt chromium alloy. The alloy of one of the articulating surfaces (20,16) has less than 0.1% carbon by weight, while the other comprises at least 0.18% carbon by weight.

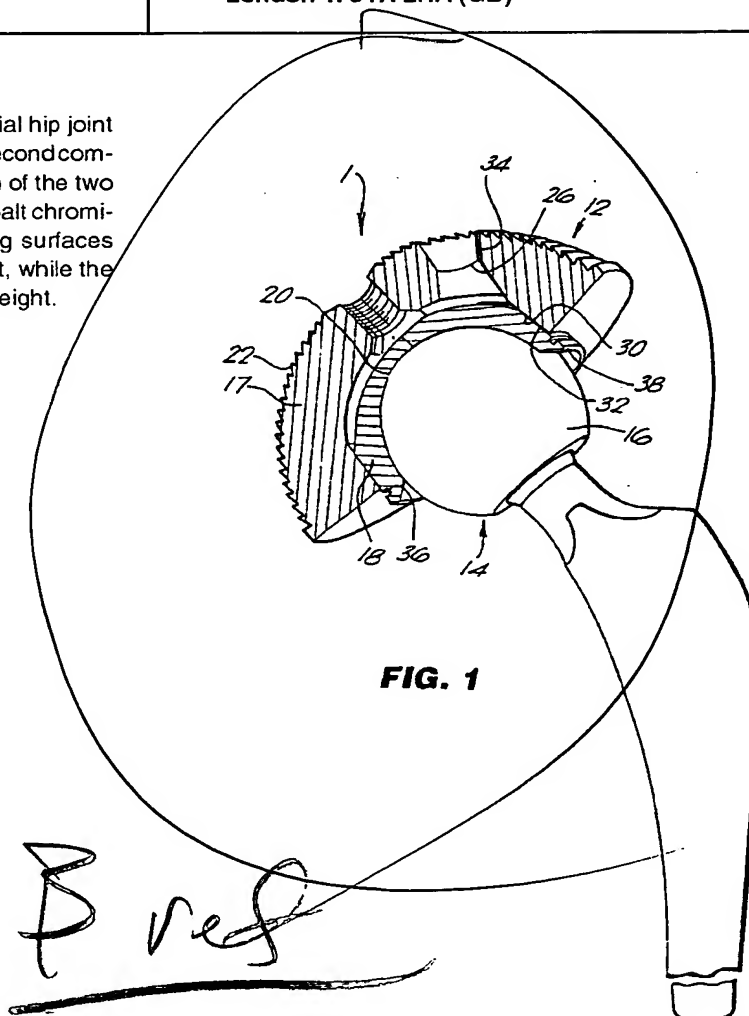


FIG. 1

EP 0 841 041 A3



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 97 30 9050

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.8)
P,D, X Y A	WO 97 16138 A (WRIGHT MEDICAL TECHNOLOGY) 9 May 1997 * page 6, line 21 - page 7, line 5; claim 1; figures *	9 1,10,11 7,8	A61L27/00 A61F2/32 A61F2/34
Y A	GB 2 000 188 A (HOWMEDICA) 4 January 1979 * abstract; claims 3,10,14,15; examples 1-5 *	1,10 2-5,7,9	
Y A	US 5 462 575 A (DEL CORSO) 31 October 1995 * column 1, line 7 - line 42; claims 12,15 *	1,11 2-5	
A	US 5 198 308 A (SHETTY) 30 March 1993 * the whole document *	2-4,10	
A	US 5 549 704 A (SUTTER) 27 August 1996 * column 4, line 54 - line 62; figures *	2-4,7-9, 11	
A	US 5 308 412 A (SHETTY) 3 May 1994 * column 3, line 55 - column 4, line 19; figure 1; tables I,II *	2,7-9,11	TECHNICAL FIELDS SEARCHED (Int.Cl.6) A61L A61F
A	EP 0 648 478 A (BRISTOL-MYERS SQUIBB COMPANY) 19 April 1995 * column 4, line 22 - line 25; figures *	7-9	
P,A	WO 97 00978 A (FIRTH RIXSON SUPERALLOYS LIMITED) 9 January 1997 * page 1, line 6 - page 2, line 13; claims 5,23 *	6	
A	FR 2 327 757 A (KEMPF) 13 May 1977		
A	US 5 002 731 A (CROOK) 26 March 1991		
		-/-	
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 20 January 1999	Examiner Klein, C
CATEGORY OF CITED DOCUMENTS		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document			

EPO FORM 1503 03.92 (P04C01)



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 97 30 9050

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
A	US 4 714 468 A (WANG) 22 December 1987 -----		
			TECHNICAL FIELDS SEARCHED (Int.Cl.6)
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 20 January 1999	Examiner Klein, C
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

EPO FORM 1603 03.82 (Pct/Cot)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 97 30 9050

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

20-01-1999

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9716138 A	09-05-1997	EP 0862395 A	09-09-1998
GB 2000188 A	04-01-1979	AU 503731 A	20-09-1979
		BE 868372 A	22-12-1978
		CA 1100339 A	05-05-1981
		CH 633046 A	15-11-1982
		DE 2827440 A	04-01-1979
		FR 2395320 A	19-01-1979
		IE 47003 B	30-11-1983
		JP 1088420 C	23-03-1982
		JP 54010224 A	25-01-1979
		JP 56028980 B	06-07-1981
		LU 79855 A	22-01-1980
		NL 7806739 A	28-12-1978
US 5462575 A	31-10-1995	EP 0736108 A	09-10-1996
		JP 9506142 T	17-06-1997
		WO 9517530 A	29-06-1995
US 5198308 A	30-03-1993	CA 2051900 A	22-06-1992
		US 5323954 A	28-06-1994
US 5549704 A	27-08-1996	WO 9607374 A	14-03-1996
		DE 19580966 D	26-09-1996
US 5308412 A	03-05-1994	NONE	
EP 648478 A	19-04-1995	CA 2133718 A	19-04-1995
		JP 7171174 A	11-07-1995
WO 9700978 A	09-01-1997	GB 2302551 A	22-01-1997
		AU 6233396 A	22-01-1997
FR 2327757 A	13-05-1977	NONE	
US 5002731 A	26-03-1991	AT 394397 B	25-03-1992
		AU 616841 B	07-11-1991
		AU 5326390 A	18-10-1990
		BE 1003210 A	14-01-1992
		CA 2014694 A,C	17-10-1990
		CH 681985 A	30-06-1993
		DE 4011874 A	18-10-1990
		DK 91490 A	18-10-1990
		FR 2645879 A	19-10-1990
		GB 2230536 A,B	24-10-1990
		HK 74996 A	10-05-1996

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 97 30 9050

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

20-01-1999

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5002731 A		IT 1240607 B	17-12-1993
		JP 1862175 C	08-08-1994
		JP 2274830 A	09-11-1990
		KR 9309980 B	13-10-1993
		NL 9000515 A,B	16-11-1990
		SE 507334 C	18-05-1998
		SE 9001332 A	18-10-1990
		SU 1836475 A	23-08-1993
US 4714468 A	22-12-1987	US 4668290 A	26-05-1987
		CA 1288619 A	10-09-1991
		EP 0213781 A	11-03-1987
		IE 58550 B	06-10-1993
		JP 1729501 C	29-01-1993
		JP 4013416 B	09-03-1992
		JP 62080245 A	13-04-1987
		JP 2037672 C	28-03-1996
		JP 3146631 A	21-06-1991
		JP 7074409 B	09-08-1995

EPO FORM P459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

THIS PAGE BLANK (USPTO)